

## Dual serial port fanless embedded IPC



### Key features:

- Support intel Celeron processor, integrated intel HD graphics
- Supports 1\*SO-DIMM DDR4 memory slot and mSATA solid-state drive
- 1\*Gigabit Ethernet port, support network wake-up, diskless boot, external SIM card slot, optional WIFI/Bluetooth/4G module
- 1\*RS232 DB9 COM serial port, 1\*Console RJ-45 serial port, HDMI+VGA dual display output
- BIOS support Watchdog hardware reset and power on/off function
- Compact and sturdy fully sealed aluminum alloy chassis and large-area aluminum fin fanless heat dissipation structure, wide temperature (-10 ~ 60°C) stable operation
- The mini is only the size of the palm of your hand, and the main unit is available in black/silver, and supports embedded, wall-mounted, and desktop installation

### Product Introduction

The SCI-S4010 fanless embedded computer is powered by an intel Celeron processor, supports DDR4 memory, and offers a variety of options for mSATA storage. It is equipped with rich interfaces, including LAN, COM RS232, USB, SIM card slot, HDMI+VGA dual display, etc., expandable WIFI/Bluetooth/4G module, supporting Windows and Linux systems. The aluminum alloy shell of the whole machine has strong properties, the aluminum fin design quickly dissipates the heat of the host, and the fanless and fully enclosed structure effectively prevent dust from entering, so as to ensure the stable operation of the host in a wide temperature (-10 ~ 60°C) working environment. Embedded, wall-mounted, and desktop installation methods are fast and flexible for installation, which can be applied to industrial control, logistics and warehousing, self-service terminals, security machine vision, mini servers, smart cities and other fields.

### Specifications


system	C P U	intel J4125
	Display chips	intel Core graphics card
	Memory support	SO-DIMM DDR4
	Hard disk support	mSATA SSD
	Network card chip	Realtek RTL8111 Gigabit LAN card
	Audio chips	integration
	Power supply characteristics	Input AC 220V, DC 12V power adapter
	Wireless communications	1*Mini-PCIE slot (optional WIFI/Bluetooth/4G module)
	operating system	Support Windows/Linux
	B I O S	supports power-on, timed boot, network wake-up, and diskless boot
Watchdog	Watchdog supports hardware reset (256 levels, 0~255 seconds)	
interface	I/O interface	4×USB、1×HDMI、1×VGA、1×LAN、1×Audio、1×Mic、1×COM DB9、1×SIM Card slots、1×Console RJ-45、1×DC、1×Power
	Extended interfaces	1×SIM external card slot, 1× Mini-PCIE
structure	Installation	Support embedded, wall-mounted, and desktop mounting
	Product dimensions	The main engine is 179×125×55mm, packing: 205×175×120mm
environment	Product weight	net weight:1.2kg, gross weight:1.9kg
	Material color	Aluminum alloy chassis, color: black/silver
	Ambient temperature	Working environment: -10°C~60°C, transportation and storage environment: -20°C~70°C, relative humidity: 5%-95% (no condensation).
	Resistant	Anti-vibration: 5~500Hz, 2Grms random vibration; Impact-resistant working condition:

	to vibration shocks	10G@11ms
	Anti-interference static electricity	Anti-interference: EMI/EMC interference detection standard; ESD static electricity: contact discharge $\pm 8KV$ , air discharge $\pm 15KV$

Product images



Dimensional interfaces

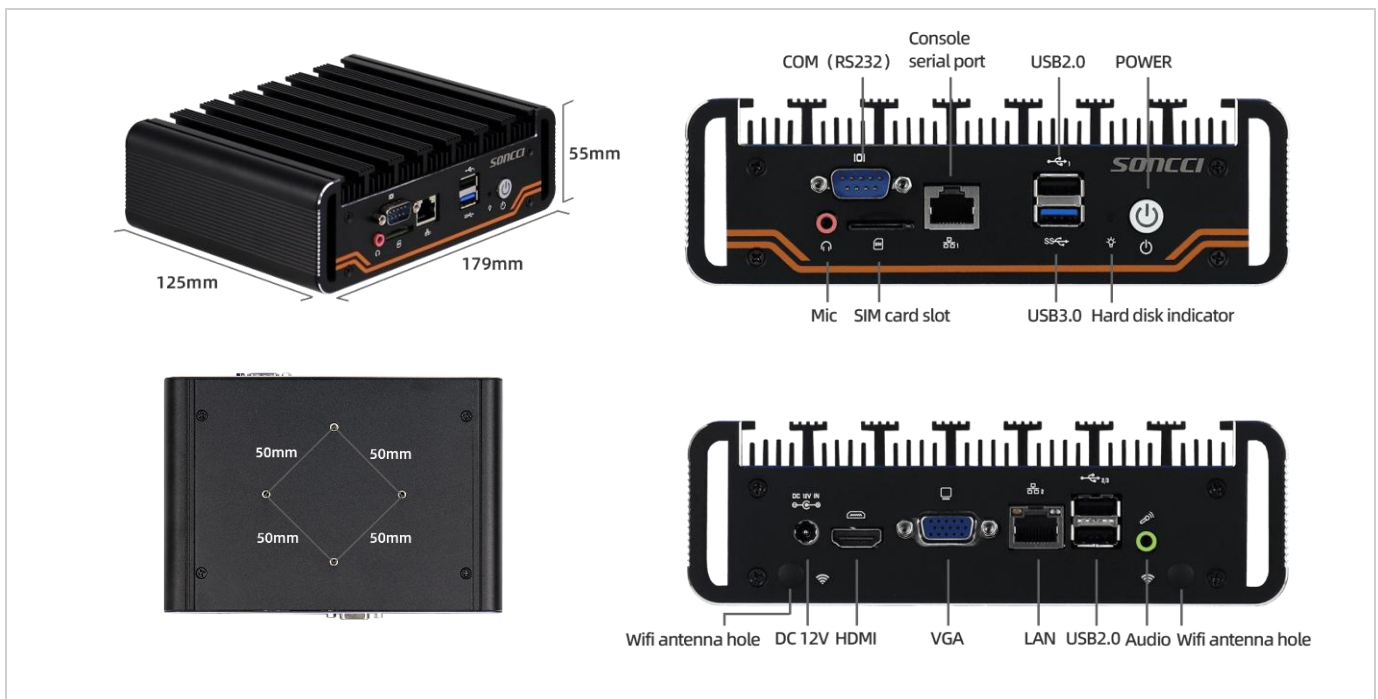

Ordering Information

Model	CPU	Cores	Processor	Memory	SSD	SATA	GPIO	LAN	COM	HDMI	VGA	USB2.0	USB3.0	SIM	Power
SCI-S4010 (J4125)	J4125	4/4	2.00-2.70 GHz	DDR4	1	N/A	1	2	2	1	1	3	1	1	DC 12V

Configuration upgrade

name	description	remark
Memory sticks	4G / 8G / 16G	Optional
hard disk	64G / 128G/256G/512G/1TB SSD、500G/1TB/ 2TB 2.5" SATA hard drive	Optional
Wireless communication	2.4G/5G dual-band WIFI, Bluetooth or 4G module	Optional
COM port	The default RS 232 of the 6 COM ports is selected, and the switch of RS485 is optional for 2 COM ports	Optional
Case color	Black/ Silver	Optional

## Accessories list

name	description	quantity	remark
Power adapter	DC 12V5A power adapter	1	Standard
Power cord	National standard, European standard, British standard, American standard, etc., length can be 1.5m / 2m / 3m / 5m / 10m	1	Optional
Warranty card	Soncci logo / neutral	1	Optional
Certificate	Soncci logo / neutral	1	Optional
Wall mount bracket	For mounting and hanging on the back of a monitor or hanging on a wall	1	Optional